

EPS1U

Power Supply Design Guide

A Server System Infrastructure (SSI) Specification

For 1U Rack Chassis Power Supplies

Version 2.93

Revision History

Orig./Rev.	Description of Changes
2.1	Post design guide
2.9	Added higher power levels up to 650W. Removed lower power levels. Added cross loading plots. Added standby fan operation. Added option for tighter 12V regulation. Added 12V4 rail to higher power levels. Add new SSI efficiency requirements (recommended level & loading conditions). Reduced holdup time requirements to 75% of max load. Increase 12V rails for >500W. Tpwork_on max time reduced to 500msec. Change 5VSB to 3.0A for >500W. Removed AC warning signal. Added reference to PSMI spec. Modified SMBus section (FRU and PSMI) to 3.3V with 5V tolerance. Modified 240VA section; removed common plane, change to <20A for all 12V outputs. Updated sound power & airflow requirements Updated efficiency testing method
2.91	Increase 5V current to 30A, combined 3.3V/5V power to 120W, and decrease 3.3V current to 10A for the 600W and 650W power levels. Increase 12V1/2 current for 450W-550W power levels.
2.92	Relax require regulation limits. Added optional regulation limits.
2.93	Increased 3.3V/5V combined power to 130W for 600W and 650W.

Disclaimer:

THIS SPECIFICATION IS PROVIDED "AS IS" WITH NO WARRANTIES WHATSOEVER, INCLUDING ANY WARRANTY OF MERCHANTABILITY, NONINFRINGEMENT, FITNESS FOR ANY PARTICULAR PURPOSE, OR ANY WARRANTY OTHERWISE ARISING OUT OF ANY PROPOSAL, SPECIFICATION OR SAMPLE. WITHOUT LIMITATION, THE PROMOTERS (Intel Corporation, NEC Corporation, Dell Computer Corporation, Data General a division of EMC Corporation, Compaq Computer Corporation, Silicon Graphics Inc., and International Business Machines Corporation) DISCLAIM ALL LIABILITY FOR COST OF PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES, LOST PROFITS, LOSS OF USE, LOSS OF DATA OR ANY INCIDENTAL, CONSEQUENTIAL, DIRECT, INDIRECT, OR SPECIAL DAMAGES, WHETHER UNDER CONTRACT, TORT, WARRANTY OR OTHERWISE, ARISING IN ANY WAY OUT OF USE OR RELIANCE UPON THIS SPECIFICATION OR ANY INFORMATION HEREIN.

The Promoters disclaim all liability, including liability for infringement of any proprietary rights, relating to use of information in this specification. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted herein.

This specification and the information herein is the confidential and trade secret information of the Promoters. Use, reproduction and disclosure of this specification and the information herein are subject to the terms of the S.S.I. Specification Adopter's Agreement.

Copyright © Intel Corporation, Dell Computer Corporation, Hewlett Packard Company, Silicon Graphics Inc., International Business Machines Corporation, 2002 - 2004.

Contents

1	Purpose.....	7
2	Conceptual Overview	7
3	Definitions/Terms/Acronyms.....	8
4	Mechanical Overview	9
4.1	Card Edge Form Factor	9
4.2	Wire Harness	10
4.3	Acoustic Requirements.....	11
4.4	Airflow Requirements.....	11
4.5	Temperature Requirements.....	11
5	AC Input Requirements.....	12
5.1	AC Inlet Connector.....	12
5.2	AC Input Voltage Specification	12
5.3	Input Under Voltage	12
5.4	Efficiency.....	13
5.5	AC Line Dropout	13
5.6	AC Line Fuse	14
5.7	AC Inrush.....	14
5.8	AC Line Transient Specification.....	15
5.9	AC Line Fast Transient Specification.....	15
6	DC Output Specification	16
6.1	Wire Harness Output Connectors.....	16
6.1.1	Required Baseboard power connector	16
6.1.2	Required Processor Power Connector	17
6.1.3	+12V4 Baseboard Power Connector	17
6.1.4	Peripheral Power Connectors.....	17
6.1.5	Floppy Power Connector	18
6.1.6	Serial ATA Power Connector.....	18
6.1.7	Server Signal Connector.....	18
6.2	Grounding	19
6.3	Remote Sense	19
6.4	Output Power/Currents	19
6.5	Standby Output.....	25
6.5.1	Fan operation in standby mode	25
6.6	Voltage Regulation.....	25
6.7	Dynamic Loading	26
6.8	Capacitive Loading	26
6.9	Ripple / Noise.....	27
6.10	Timing Requirements.....	28
7	Protection Circuits.....	31
7.1	Current Limit	31
7.2	240VA Protection	31
7.3	Over Voltage Protection.....	32
7.4	Over Temperature Protection	32
8	Control and Indicator Functions	33
8.1	PSON [#]	33
8.2	PWOK (Power OK)	34

8.3	SMBus Communication	34
8.4	Power Supply Management Interface.....	34
8.5	Field Replacement Unit (FRU) Signals.....	35
8.5.1	FRU Data.....	35
8.5.2	FRU Data Format	35
8.6	LED Indicator	36
9	MTBF.....	36
10	Agency Requirements.....	37

Figures

Figure 1:	Enclosure Drawing	9
Figure 2:	Alternate Enclosure Drawing.....	10
Figure 3	System Airflow Impedance.....	11
Figure 4	Cross loading graph for 450W configuration.....	21
Figure 5	Cross loading graph for 500W configuration.....	22
Figure 6	Cross loading graph for 550W configuration.....	22
Figure 7	Cross loading graph for 600W configuration.....	24
Figure 8	650W Cross loading graph.....	25
Figure 9:	Output Voltage Timing.....	28
Figure 10:	Turn On/Off Timing (Signal Power Supply).....	30
Figure 11:	PSON# Signal Characteristics	33

Tables

Table 1:	Definitions, Terms, and Acronyms (listed alphabetically).....	8
Table 2	Recommended Acoustic Sound Power Levels	11
Table 3:	Thermal Requirements	12
Table 4:	AC Input Rating	12
Table 5:	Efficiency	13
Table 6	Efficiency Loading Table	Error! Bookmark not defined.
Table 7:	AC Line Sag Transient Performance.....	15
Table 8:	AC Line Surge Transient Performance	15
Table 9:	P1 Baseboard Power Connector	16
Table 10:	Processor Power Connector – 550/650W	17
Table 11:	Peripheral Power Connectors.....	17
Table 12:	P8 Floppy Power Connector.....	18
Table 13:	Floppy Power Connector	18
Table 14:	Server Signal Connector	19
Table 15:	250 W Load Ratings	20
Table 16:	300 W Load Ratings	20
Table 17:	350 W Load Ratings	20
Table 18:	450 W Load Ratings	21
Table 19:	500 W Load Ratings	21
Table 20:	550 W Load Ratings	22
Table 21:	600 W Load Ratings	23
Table 22:	650 W Load Ratings	24
Table 23:	Voltage Regulation Limits.....	26
Table 24:	Optional +5V Regulation Limits	26
Table 25:	Transient Load Requirements	26

Table 26: Capacitive Loading Conditions	27
Table 27: Ripple and Noise	27
Table 28: Output Voltage Timing.....	28
Table 29: Turn On/Off Timing.....	29
Table 30: Over Current Protection.....	31
Table 31: Over Current Protection.....	32
Table 32: Over Voltage Limits	32
Table 33: PSON [#] Signal Characteristic	33
Table 34: PWOK Signal Characteristics.....	34
Table 35: FRU Device Information	35
Table 36: FRU Device Product Information Area	35
Table 37: FRU Device MultiRecord Area	35
Table 38: LED Indicators	36

1 Purpose

This specification defines non-redundant power supplies that support 1U rack mount entry server systems. The entry-level power supply is not intended to be a hot swap type of power supply. The parameters of this supply are defined in this specification for open industry use. This specification defines power supplies ranging from 250 W to 650 W, with six outputs: 3.3 V, 5 V, 12 V, -12 V, and 5 VSB. The form factor fits into a 1U system and provides a wire harness or docking solution for output connections. An IEC connector is provided on the external face for AC input to the power supply. The power supply contains fans for cooling, while meeting acoustic requirements.

2 Conceptual Overview

In the Entry server market, the bulk power system must source power on several output rails.

These rails are typically as follows:

- +3.3 V
- +5 V
- +12 V
- -12 V
- 5V standby

NOTES

Local DC-DC converters shall be utilized for processor power, and will ideally convert power from the +12 V rail, however, they may also convert power from other rails.

The +12V rail may be separated into three +12V rails to meet regulatory requirements for energy hazards (240VA).

The bulk power system may be an n+1 redundant power system or a non-redundant power system.

3 Definitions/Terms/Acronyms

Table 1: Definitions, Terms, and Acronyms (listed alphabetically)

Required	The status given to items within this design guide, which are required to meet SSI guidelines and a large majority of system applications.
Recommended	The status given to items within this design guide which are not required to meet SSI guidelines, however, are required by many system applications.
Optional	The status given to items within this design guide, which are not required to meet SSI guidelines, however, some system applications may optionally use these features.
Full Ranging	A full-ranging power supply automatically senses and adjusts itself to the proper input voltage range (110 VAC or 220 VAC). No manual switches or manual adjustments are needed.
CFM	Cubic Feet per Minute (airflow).
Dropout	A condition that allows the line voltage input to the power supply to drop to below the minimum operating voltage.
Latch Off	A power supply, after detecting a fault condition, shuts itself off. Even if the fault condition disappears the supply does not restart unless manual or electronic intervention occurs. Manual intervention commonly includes briefly removing and then reconnecting the supply, or it could be done through a switch. Electronic intervention could be done by electronic signals in the Server System.
Monotonically	A waveform changes from one level to another in a steady fashion, without intermediate retracement or oscillation.
MTBF	Mean time between failure
Noise	The periodic or random signals over frequency band of 0 Hz to 20 MHz.
Overcurrent	A condition in which a supply attempts to provide more output current than the amount for which it is rated. This commonly occurs if there is a "short circuit" condition in the load attached to the supply.
PFC	Power Factor Corrected.
PWOK	A typical logic level output signal provided by the supply that signals the Server System that all DC output voltages are within their specified range.
Ripple	The periodic or random signals over a frequency band of 0 Hz to 20 MHz.
Rise Time	Rise time is defined as the time it takes any output voltage to rise from 10% to 95% of its nominal voltage.
Sag	The condition where the AC line voltage drops below the nominal voltage conditions.
Surge	The condition where the AC line voltage rises above nominal voltage.
VSB or Standby Voltage	An output voltage that is present whenever AC power is applied to the AC inputs of the supply.

4 Mechanical Overview


STATUS
Required

There are three physical sizes of the power supply enclosure intended to accommodate different power levels from 250W up to 650W. Two output connector designs are defined, also. A card edge solution provides ease of installation and removal, while the wire harness design provides a traditional cabled solution. The enclosure of the entry 1U power supply is designed for use in 1U rack mounted systems.

Length	Recommended power levels
215mm	250W – 350W
300mm	450W – 600W
355mm	600W – 650W

4.1 Card Edge Form Factor

The card edge form factor is intended to allow users and manufacturers easy installation and removal of the power supply into the system. Refer to Figure 1 for details. There are three different lengths for use with different power levels. The recommended length for each power level is shown below.

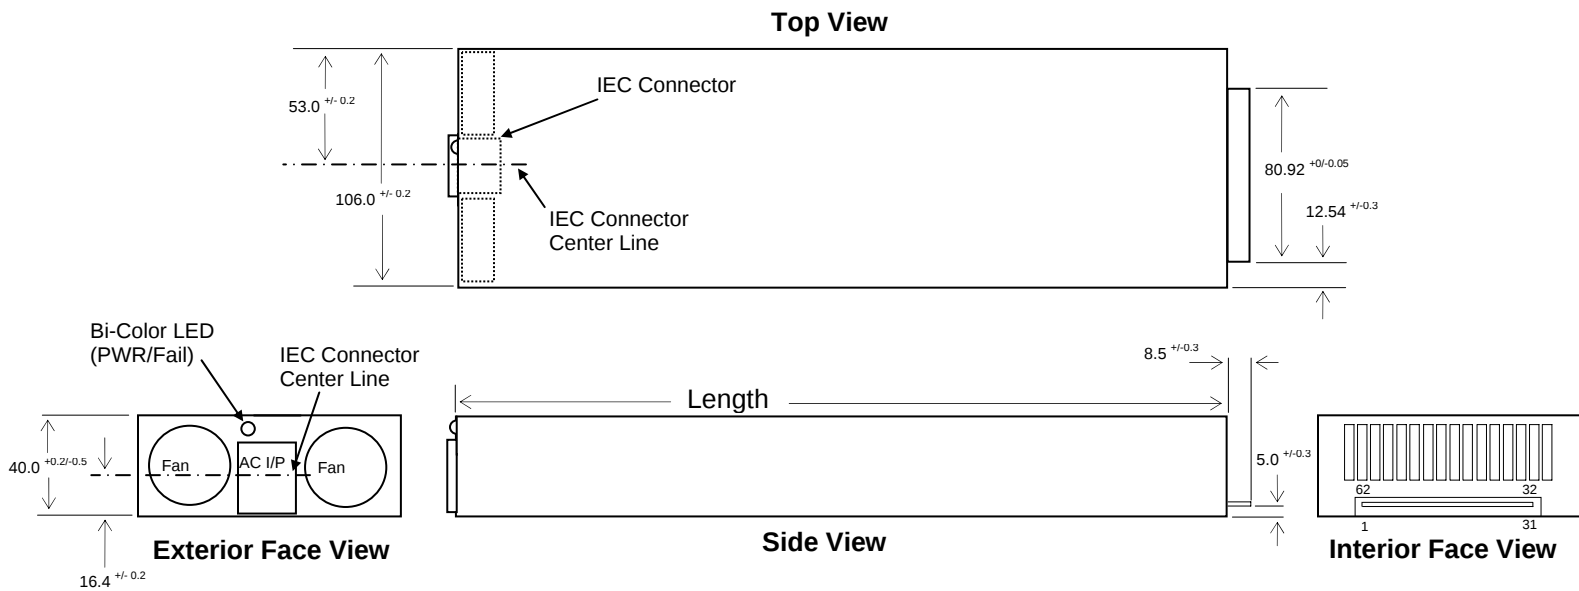


All dimensions are in millimeters.

Figure 1: Enclosure Drawing

4.2 Wire Harness

STATUS
Low Power Form Factor

Systems may require a wire harness connection directly from the power supply to the system. Figure 2 shows the wire harness version details. Refer to the EPS2U specification on the SSI web site (<http://www.ssiforum.org>) for possible output connector configurations. Due to different system board layouts the wire harness length may vary.

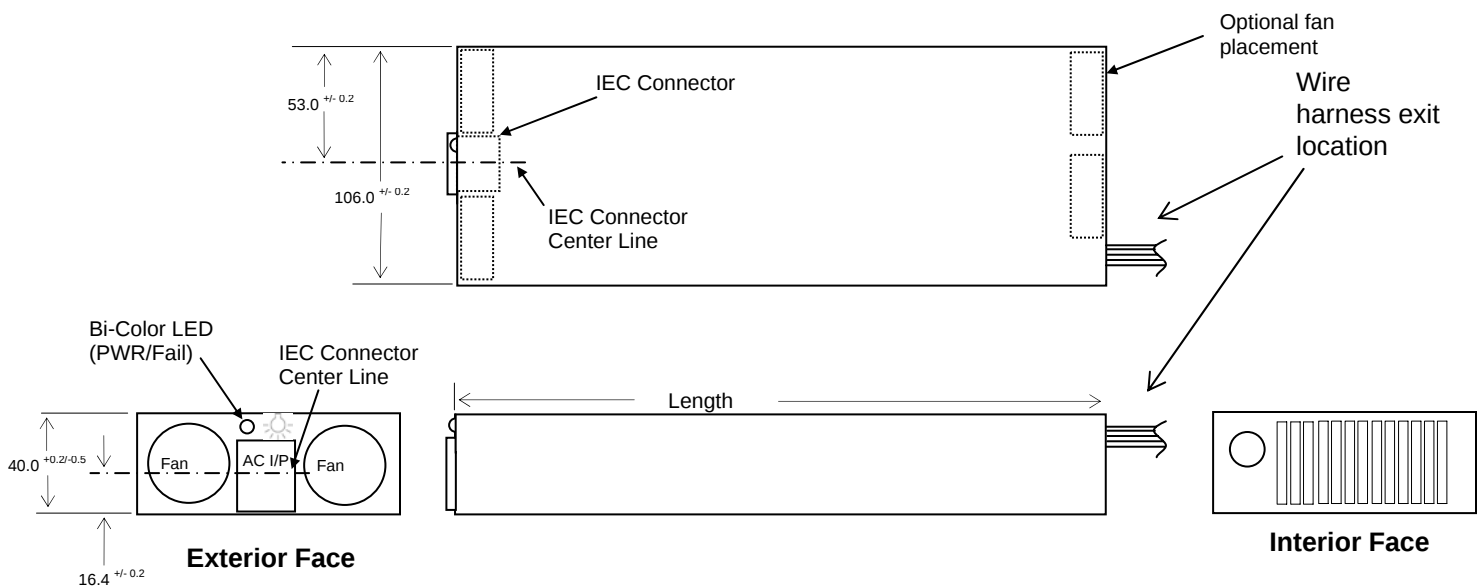

All dimensions are in millimeters.

Figure 2: Alternate Enclosure Drawing

4.3 Acoustic Requirements

STATUS
Recommended

It is recommended the power supply have a variable speed fan based on temperature and loading conditions. There are three different acoustic sound power levels defined at different ambient temperatures and loading conditions.

Table 2 Recommended Acoustic Sound Power Levels


	Idle	Typical	Max
Ambient Temperature	28°C	28°C	45°C
% Loading	40%	60%	100%
Sound Power (BA)	5.4	5.6	6.5

4.4 Airflow Requirements

STATUS
Recommended

The air shall exit the power supply on the AC inlet face. The power supply shall meet all requirements with the below system airflow impedance presented to the power supplies airflow path.

Figure 3 System Airflow Impedance

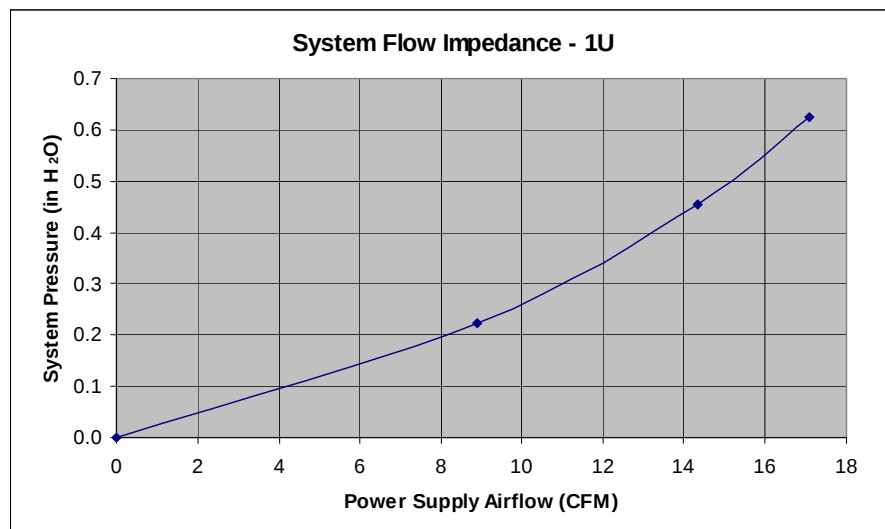

4.5 Temperature Requirements

STATUS
Recommended

The power supply shall operate within all specified limits over the T_{op} temperature range. All airflow shall pass through the power supply and not over the exterior surfaces of the power supply.

Table 3: Thermal Requirements

Item	Description	MIN	MAX	Units
T_{op}	Operating temperature range.	0	50	°C
T_{non-op}	Non-operating temperature range.	-40	70	°C

The power supply must meet UL enclosure requirements for temperature rise limits. All sides of the power supply, with exception to the air exhaust side, must be classified as “Handle, knobs, grips, etc. held for short periods of time only”.

5 AC Input Requirements

STATUS
Required

The power supply shall incorporate universal power input with active power factor correction, which shall reduce line harmonics in accordance with the EN61000-3-2 and JEIDA MITI standards.

5.1 AC Inlet Connector

STATUS
Required

The AC input connector shall be an IEC 320 C-14 power inlet. This inlet is rated for 15 A / 250 VAC.

5.2 AC Input Voltage Specification

STATUS
Required

The power supply must operate within all specified limits over the following input voltage range. Harmonic distortion of up to 10% THD must not cause the power supply to go out of specified limits. The power supply shall operate properly at 85 VAC input voltage to guarantee proper design margins.

Table 4: AC Input Rating

PARAMETER	MIN	RATED	MAX
Voltage (110)	90 V _{rms}	100-127 V _{rms}	140 V _{rms}
Voltage (220)	180 V _{rms}	200-240 V _{rms}	264 V _{rms}
Frequency	47 Hz		63 Hz

5.3 Input Under Voltage

STATUS
Required

The power supply shall contain protection circuitry such that application of an input voltage below the minimum specified in section 5.2 shall not cause damage to the power supply.

5.4 Efficiency

STATUS
Recommended/Required

The following table provides recommended and required minimum efficiency levels. These are provided at three different load levels; 100%, 50% and 20%. The “required” minimum efficiency levels are for the purpose of proper power supply cooling when installed in the system. The “recommended” minimum efficiency levels are for the purpose of reducing the system’s AC power consumption. The efficiency is specified at 50% and 20% loading conditions to help reduce system power consumption at typical system loading conditions.

Efficiency shall be tested at AC input voltages of 115VAC and 230VAC. Refer to www.efficientpowersupplies.org for details on proper efficiency testing methods.

Table 5: Efficiency

Loading	100% of maximum	50% of maximum	20% of maximum
Required minimum	70%	72%	65%
Recommended minimum	80%	83%	78%

5.5 AC Line Dropout

STATUS
Required

An AC line dropout is defined to be when the AC input drops to 0 VAC at any phase of the AC line for any length of time. During an AC dropout of one cycle or less the power supply must meet dynamic voltage regulation requirements up to 75% of rated output load. An AC line dropout of one cycle or less shall not cause any tripping of control signals or protection circuits. If the AC dropout lasts longer than one cycle or the load is greater than 75%, the power supply should recover and meet all turn on requirements. The power supply must meet the AC dropout requirement over rated AC voltages, frequencies, and output loading conditions. Any dropout of the AC line shall not cause damage to the power supply.

5.6 AC Line Fuse

STATUS
Required

The power supply shall incorporate one input fuse on the LINE side for input over current protection to prevent damage to the power supply and meet product safety requirements. Fuses should be slow blow type or equivalent to prevent nuisance trips. AC inrush current shall not cause the AC line fuse to blow under any conditions. All protection circuits in the power supply shall not cause the AC fuse to blow unless a component in the power supply has failed. This includes DC output load short conditions.

STATUS
Optional

Some system applications may require a second input fuse in the NEUTRAL side of the AC input. In this case two fuses would be required; one in the LINE side and one in the NEUTRAL side of the AC inlet to the power supply.

5.7 AC Inrush

STATUS
Required

The power supply must meet inrush requirements for any rated AC voltage, during turn on at any phase of AC voltage, during a single cycle AC dropout condition, during repetitive ON/OFF cycling of AC, and over the specified temperature range (T_{op}). The peak inrush current shall be less than the ratings of its critical components (including input fuse, bulk rectifiers, and surge limiting device).

STATUS
Recommended

An additional inrush current limit is recommended for some system applications that require multiple systems on a single AC circuit. AC line inrush current shall not exceed 30 A peak for one-quarter of the AC cycle, after which, the input current should be no more than the specified maximum input current from Table 4.

5.8 AC Line Transient Specification

STATUS
Recommended

AC line transient conditions shall be defined as “sag” and “surge” conditions. Sag conditions (also referred to as “brownout” conditions) will be defined as the AC line voltage dropping below nominal voltage. Surge will be defined as the AC line voltage rising above nominal voltage.

The power supply shall meet the requirements under the following AC line sag and surge conditions.

Table 6: AC Line Sag Transient Performance

Duration	Sag	Operating AC Voltage	Line Frequency	Performance Criteria
Continuous	10%	Nominal AC Voltage ranges	50/60 Hz	No loss of function or performance
0 to 1 AC cycle	100%	Nominal AC Voltage ranges	50/60 Hz	No loss of function or performance
> 1 AC cycle	>10%	Nominal AC Voltage ranges	50/60 Hz	Loss of function acceptable, self-recoverable

Table 7: AC Line Surge Transient Performance

Duration	Surge	Operating AC Voltage	Line Frequency	Performance Criteria
Continuous	10%	Nominal AC Voltages	50/60 Hz	No loss of function or performance
0 to ½ AC cycle	30%	Mid-point of nominal AC Voltages	50/60 Hz	No loss of function or performance

5.9 AC Line Fast Transient Specification

STATUS
Recommended

The power supply shall meet the EN61000-4-5 directive and any additional requirements in IEC1000-4-5:1995 and the Level 3 requirements for surge-withstand capability, with the following conditions and exceptions:

- These input transients must not cause any out-of-regulation conditions, such as overshoot and undershoot, nor must it cause any nuisance trips of any of the power supply protection circuits.
- The surge-withstand test must not produce damage to the power supply.
- The supply must meet surge-withstand test conditions under maximum and minimum DC-output load conditions.

6 DC Output Specification

6.1 Wire Harness Output Connectors

STATUS
Recommended

The power supply shall have the following output connector and wire harness configurations.

6.1.1 Required Baseboard power connector

STATUS
Required

Connector housing: 24-Pin Molex 39-01-2240 or equivalent

Contact: Molex 44476-1111 or equivalent

Table 8: P1 Baseboard Power Connector

Pin	Signal	18 AWG Color	Pin	Signal	18 AWG Color
1	+3.3 VDC	Orange	13	+3.3 VDC	Orange
2	+3.3 VDC	Orange	14	-12 VDC	Blue
3	COM	Black	15	COM	Black
4	+5 VDC	Red	16	PS_ON	Green
5	COM	Black	17	COM	Black
6	+5 VDC	Red	18	COM	Black
7	COM	Black	19	COM	Black
8	PWR OK	Gray	20	Reserved (-5 V in ATX)	N.C.
9	5 VSB	Purple	21	+5 VDC	Red
10	+12 V3	Yellow	22	+5 VDC	Red
11	+12 V3	Yellow	23	+5 VDC	Red
12	+3.3 VDC	Orange	24	COM	Black

If 240VA limiting is not a requirement for the power supply than all +12V outputs are common and may have the same wire color (yellow).

6.1.2 Required Processor Power Connector

STATUS
Required

Connector housing: 8-Pin Molex 39-01-2080 or equivalent

Contact: Molex 44476-1111 or equivalent

Table 9: Processor Power Connector – 550/650W

Pin	Signal	18 AWG color	Pin	Signal	18 AWG Color
1	COM	Black	5	+12 V1	Yellow
2	COM	Black	6	+12 V1	Yellow
3	COM	Black	7	+12 V2	Yellow
4	COM	Black	8	+12 V2	Yellow

If 240VA limiting is not a requirement for the power supply than all +12V outputs are common and may have the same wire color (yellow).

6.1.3 +12V4 Baseboard Power Connector

STATUS
Required for 600W and 650W power levels

Systems that require more than 16A of +12V current to the baseboard will require this additional 2x2 power connector. This is due to the limited +12V capability of the 2x12 baseboard power connector. +12V4 will power this 2x2 connector.

Pin	Signal	18 AWG color	Pin	Signal	18 AWG Color
1	COM	Black	3	+12 V4	Yellow/Green Stripe
2	COM	Black	4	+12 V4	Yellow/Green Stripe

If 240VA limiting is not a requirement for the power supply than all +12V outputs are common and may have the same wire color (yellow)

6.1.4 Peripheral Power Connectors

STATUS
Required

Connector housing: Amp 1-480424-0 or equivalent

Contact: Amp 61314-1 contact or equivalent

Table 10: Peripheral Power Connectors

Pin	Signal	18 AWG Color
1	+12V3 / +12V4 ²	Yellow
2	COM	Black
3	COM	Black
4	+5 VDC	Red

1. If 240VA limiting is not a requirement for the power supply than all +12V outputs are common and may have the same wire color.
2. +12V4 is used for 600W and 650W power levels.

6.1.5 Floppy Power Connector

STATUS
Required

Connector housing: Amp 171822-4 or equivalent

Table 11: P8 Floppy Power Connector

Pin	Signal	22 AWG Color
1	+5 VDC	Red
2	COM	Black
3	COM	Black
4	+12 V3 / +12V4 ³	Yellow (Yellow/Blue Stripe or Yellow/Black Stripe) ^{1, 2}

1. For power supplies that meet the 240VA power limit levels, the 550W power supply has an additional +12V output (+12V3) that is used on the peripheral power connectors. The 650W power supply also uses an additional +12V output (+12V4) for peripheral power connectors. The information in () is for the 550-650W power supplies.
2. If 240VA limiting is not a requirement for the power supply than all +12V outputs are common and may have the same wire color.
3. +12V4 is used for 600W and 650W power levels.

6.1.6 Serial ATA Power Connector

STATUS
Optional

This is a required connector for systems with serial ATA devices.

The detailed requirements for the serial ATA connector can be found in the “Serial ATA : High Speed Serialized AT Attachment “ specification at www.serialata.org.

Table 12: Floppy Power Connector

Pin	Signal	18 AWG Color
5	+3.3VDC	Orange
4	COM	Black
3	+5VDC	Red
2	COM	Black
1	+12V3 / +12V4	Yellow

1. +12V4 is used for 600W and 650W power levels.

6.1.7 Server Signal Connector

STATUS
Optional

For server systems with SMBus features, the power supply may have an additional connector, which provides serial SMBus for FRU data and remote sense on 3.3V and Return. If the Server Signal connector is not present,

the 3.3V remote sense will be double crimped into one of the 3.3V power contacts in the Baseboard power connector.

Connector housing: 5-pin Molex 50-57-9405 or equivalent

Contacts: Molex 16-02-0088 or equivalent

Table 13: Server Signal Connector

Pin	Signal	24 AWG Color
1	SMBus Clock	White/Green Stripe
2	SMBus Data	White/Yellow Stripe
3	SMBAlert	
4	ReturnS	Black/White Stripe
5	3.3RS	Orange/White Stripe

6.2 Grounding

STATUS
Required

The ground of the pins of the power supply wire harness provides the power return path. The wire harness ground pins shall be connected to safety ground (power supply enclosure).

6.3 Remote Sense

STATUS
Optional

The power supply may have remote sense return (ReturnS) to regulate out ground drops for all output voltages; +3.3 V, +5 V, +12 V1, +12 V2, -12 V, and 5 VSB. The power supply may use remote sense (3.3VS) to regulate out drops in the system for the +3.3 V output. The +5 V, +12 V1, +12 V2, -12 V, and 5 VSB outputs only use remote sense referenced to the ReturnS signal. The remote sense input impedance to the power supply must be greater than 200 Ω on 3.3 VS and ReturnS. This is the value of the resistor connecting the remote sense to the output voltage internal to the power supply. Remote sense must be able to regulate out a minimum of 200 mV drop on the +3.3 V output. The remote sense return (ReturnS) must be able to regulate out a minimum of 200 mV drop in the power ground return. The current in any remote sense line shall be less than 5 mA to prevent voltage sensing errors. The power supply must operate within specification over the full range of voltage drops from the power supply's output connector to the remote sense points.

6.4 Output Power/Currents

STATUS
Recommendations

The following tables define power and current ratings for 250 W to 600 W power supplies. These output levels were selected to cover different types of systems and configurations. The combined output power of all outputs shall not exceed the rated output power. The tables show the load ranges for each of the power supply power levels. The power supply must meet both static and dynamic voltage regulation requirements for the minimum loading conditions.

Table 14: 250 W Load Ratings

Voltage	Minimum Continuous	Maximum Continuous	Peak
+3.3 V	0.5 A	16 A	
+5 V	0.5 A	12 A	
+12 V1	0.2 A	16 A	See note 2
+12 V2	0.5 A	10 A	See note 2
-12 V	0 A	0.5 A	
+5 VSB	0.1 A	2.0 A	

1. Maximum continuous total DC output power should not exceed 250 W.
2. Peak load on the combined 12 V output shall not exceed 22 A.
3. Maximum continuous load on the combined 12 V output shall not exceed 18 A.
4. Peak total DC output power should not exceed 300 W.
5. Peak power and current loading shall be supported for a minimum of 12 seconds.

Table 15: 300 W Load Ratings

Voltage	Minimum Continuous	Maximum Continuous	Peak
+3.3 V	0.5 A	16 A	
+5 V	0.5 A	12 A	
+12 V1	0.2 A	18 A	See note 2
+12 V2	0.5 A	18 A	See note 2
-12 V	0 A	0.5 A	
+5 VSB	0.1 A	2.0 A	

1. Maximum continuous total DC output power should not exceed 300 W.
2. Peak load on the combined 12 V output shall not exceed 24 A.
3. Maximum continuous load on the combined 12 V output shall not exceed 20 A.
4. Peak total DC output power should not exceed 350 W.
5. Peak power shall be supported for a minimum of 12 seconds.

Table 16: 350 W Load Ratings

Voltage	Minimum Continuous	Maximum Continuous	Peak
+3.3 V	0.5 A	16 A	
+5 V	0.5 A	12 A	
+12 V1	0.2 A	18 A	22 A ⁶
+12 V2	0.5 A	16 A	
-12 V	0 A	0.5 A	
+5 VSB	0.1 A	2.0 A	

1. Maximum continuous total DC output power should not exceed 350 W.
2. Peak load on the combined 12 V output shall not exceed 28 A.
3. Maximum continuous load on the combined 12 V output shall not exceed 24 A.
4. Peak total DC output power should not exceed 400 W.
5. Peak power shall be supported for a minimum of 12 seconds.
6. Peak +12 V1 current shall be supported for a minimum of 0.5 seconds.

Table 17: 450 W Load Ratings

Voltage	Minimum Continuous	Maximum Continuous	Peak
+3.3 V	1.5 A	16 A	
+5 V	1.0 A	12 A	
+12 V1	0.5 A	16 A	18 A
+12 V2	0.5 A	16 A	18 A
+12 V3	1.0 A	15 A	18 A
-12 V	0 A	0.5 A	
+5 VSB	0.1 A	2.0 A	

1. Maximum continuous total DC output power should not exceed 450 W.
2. Peak load on the combined 12 V output shall not exceed 40 A.
3. Maximum continuous load on the combined 12 V output shall not exceed 35 A.
4. Peak total DC output power should not exceed 500 W.
5. Peak power and current loading shall be supported for a minimum of 12 seconds.
6. Combined 3.3V and 5V power shall not exceed 90W.

Figure 4 Cross loading graph for 450W configuration

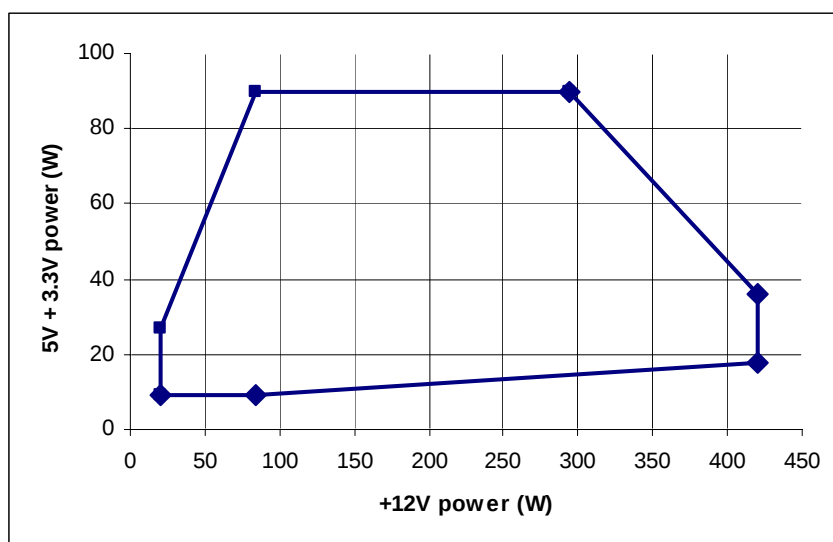


Table 18: 500 W Load Ratings

Voltage	Minimum Continuous	Maximum Continuous	Peak
+3.3 V	1.5 A	16 A	
+5 V	1.0 A	12 A	
+12 V1	0.5 A	16 A	18 A
+12 V2	0.5 A	16 A	18 A
+12 V3	1.0 A	14 A	18 A
-12 V	0 A	0.5 A	
+5 VSB	0.1 A	2.0 A	

1. Maximum continuous total DC output power should not exceed 500 W.
2. Peak load on the combined 12 V output shall not exceed 46 A.
3. Maximum continuous load on the combined 12 V output shall not exceed 39 A.
4. Peak total DC output power should not exceed 590 W.

5. Peak power and current loading shall be supported for a minimum of 12 seconds.
6. Combined 3.3V and 5V power shall not exceed 90W.

Figure 5 Cross loading graph for 500W configuration

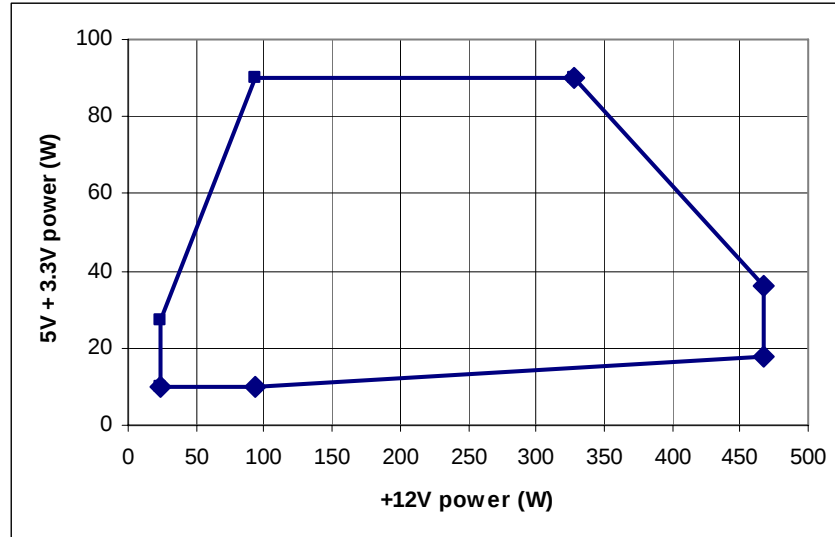


Table 19: 550 W Load Ratings

Voltage	Minimum Continuous	Maximum Continuous	Peak
+3.3 V	1.5 A	16 A	
+5 V	1.0 A	15 A	
+12 V1	0.8 A	16 A	18 A
+12 V2	0.8 A	16 A	18 A
+12 V3	1.0 A	15 A	18 A
-12 V	0 A	0.5 A	
+5 VSB	0.1 A	3.0 A	3.5 A

1. Maximum continuous total DC output power should not exceed 550 W.
2. Peak load on the combined 12 V output shall not exceed 50 A.
3. Maximum continuous load on the combined 12 V output shall not exceed 44 A.
4. Peak total DC output power should not exceed 620 W.
5. Peak power and current loading shall be supported for a minimum of 12 seconds.
6. Combined 3.3V and 5V power shall not exceed 100W.

Figure 6 Cross loading graph for 550W configuration

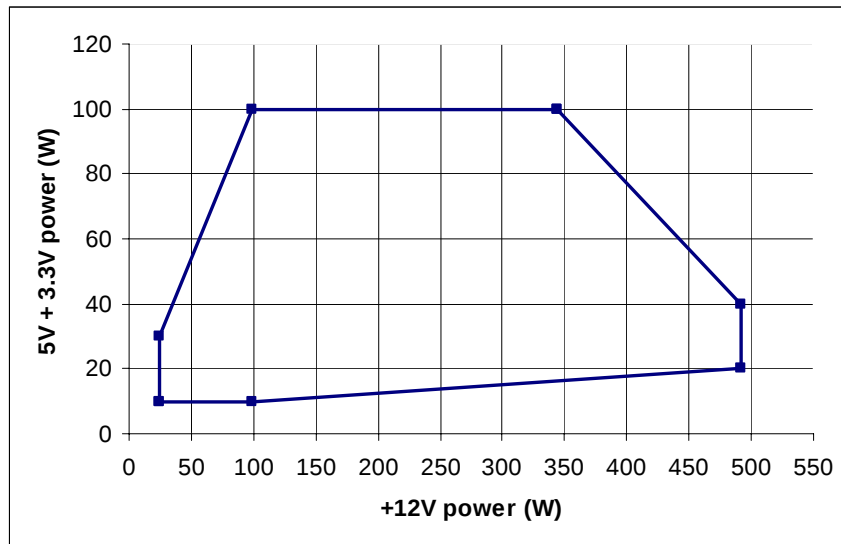


Table 20: 600 W Load Ratings

Voltage	Minimum Continuous	Maximum Continuous	Peak
+3.3 V	1.5 A	10 A	
+5 V	1.0 A	21 A	
+12 V1	0.8 A	16 A	18 A
+12 V2	0.8 A	16 A	18 A
+12 V3	0.5 A	16 A	18 A
+12 V4	0.5 A	16 A	18 A
-12 V	0 A	0.5 A	
+5 VSB	0.1 A	3.0 A	3.5 A

1. Maximum continuous total DC output power should not exceed 600 W.
2. Peak load on the combined 12 V output shall not exceed 54 A.
3. Maximum continuous load on the combined 12 V output shall not exceed 48 A.
4. Peak total DC output power should not exceed 680 W.
5. Peak power and current loading shall be supported for a minimum of 12 seconds.
6. Combined 3.3V and 5V power shall not exceed 130W.

Figure 7 Cross loading graph for 600W configuration


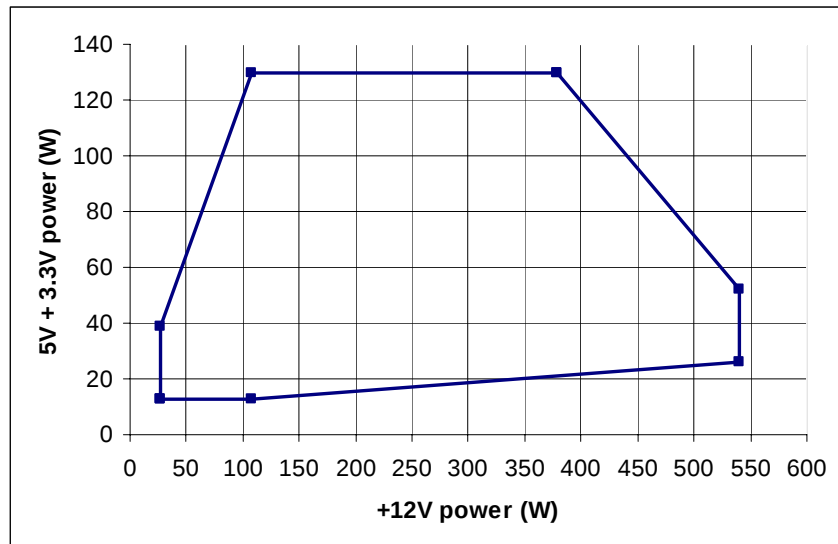


Table 21: 650 W Load Ratings

Voltage	Minimum Continuous	Maximum Continuous	Peak
+3.3 V	1.5 A	10 A	
+5 V	1.0 A	21 A	
+12 V1	0.8 A	16 A	18 A
+12 V2	0.8 A	16 A	18 A
+12 V3	0.5 A	16 A	18 A
+12 V4	0.5 A	16 A	18 A
-12 V	0 A	0.5 A	
+5 VSB	0.1 A	3.0 A	3.5 A

1. Maximum continuous total DC output power should not exceed 650 W.
2. Peak load on the combined 12 V output shall not exceed 58 A.
3. Maximum continuous load on the combined 12 V output shall not exceed 52 A.
4. Peak total DC output power should not exceed 730 W.
5. Peak power and current loading shall be supported for a minimum of 12 seconds.
6. Combined 3.3V and 5V power shall not exceed 130W.

Figure 8 650W Cross loading graph

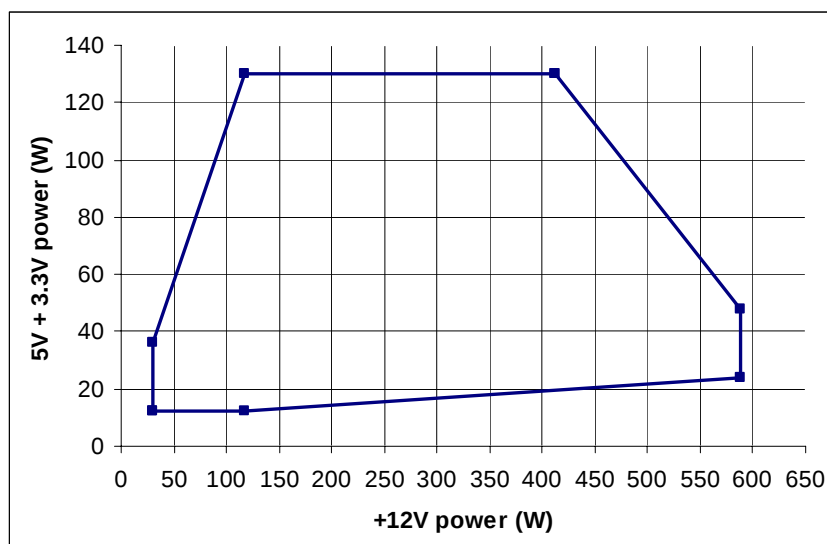

6.5 Standby Output

STATUS
Required

The 5 VSB output shall be present when an AC input greater than the power supply turn on voltage is applied.

6.5.1 Fan operation in standby mode

STATUS
Required

For standby output at the higher power level, when the supply is in standby mode it is required that the power supply fan(s) remain running at a very low speed. This helps prevent power supply overheating when many systems in the same rack are in standby mode. Running the fan(s) in standby mode also allows better cooling to the standby power converter.

6.6 Voltage Regulation

STATUS
Required

The power supply output voltages must stay within the following voltage limits when operating at steady state and dynamic loading conditions. These limits include the peak-peak ripple/noise specified in Section 6.9. All outputs are measured with reference to the return remote sense (ReturnS) signal. The 5 V, 12 V1, 12 V2, -12 V and 5 VSB outputs are measured at the power supply connectors referenced to ReturnS. The +3.3 V is measured at its remote sense signal (3.3 VS) located at the signal connector.

Table 22: Voltage Regulation Limits

Parameter	MIN	NOM	MAX	Units	Tolerance
+3.3 V	+3.14	+3.30	+3.47	V _{rms}	+5/-5%
+5 V	+4.75	+5.00	+5.25	V _{rms}	+5/-5%
+12 V1,2,3,4	+11.40	+12.00	+12.60	V _{rms}	+5/-5%
-12 V	-10.80	-12.20	-13.20	V _{rms}	+10/-10%
+5 VSB	+4.75	+5.00	+5.25	V _{rms}	+5/-5%

STATUS
Optional

Some system applications may require tighter regulation limits on the outputs. The optional regulation limits are shown below.

Table 23: Optional +5V Regulation Limits

Parameter	MIN	NOM	MAX	Units	Tolerance
+3.3 V	+3.20	+3.30	+3.47	V _{rms}	+5/-3%
+5 V	+4.85	+5.00	+5.25	V _{rms}	+5/-3%
+12 V1,2,3,4	+11.64	+12.00	+12.60	V _{rms}	+5/-3%
-12 V	-11.40	-12.00	-13.08	V _{rms}	+9/-5%
+5 VSB	+4.85	+5.00	+5.25	V _{rms}	+5/-3%

6.7 Dynamic Loading

STATUS
Required

The output voltages shall remain within the limits specified in Table 23 for the step loading and within the limits specified in Table 25 for the capacitive loading. The load transient repetition rate shall be tested between 50 Hz and 5 kHz at duty cycles ranging from 10%-90%. The load transient repetition rate is only a test specification. The Δ step load may occur anywhere within the MIN load to the MAX load shown in Table 15, Table 17, , Table 18, or Table 19.

Table 24: Transient Load Requirements

Output	Δ Step Load Size	Load Slew Rate	Capacitive Load
+3.3 V	30% of max load	0.5 A/ μ s	1000 μ F
+5 V	30% of max load	0.5 A/ μ s	1000 μ F
12 V1, 12V2, 12V3,12V4	65% of max load	0.5 A/ μ s	2200 μ F
+5 VSB	25% of max load	0.5 A/ μ s	1 μ F

6.8 Capacitive Loading

STATUS
Required

The power supply shall be stable and meet all requirements with the following capacitive loading ranges.

Table 25: Capacitive Loading Conditions

Output	MIN	MAX	Units
+3.3 V	10	6,800	μF
+5 V	10	4,700	μF
+12 V	10	11,000	μF
-12 V	1	350	μF
+5 VSB	1	350	μF

6.9 Ripple / Noise

STATUS
Required

The maximum allowed ripple/noise output of the power supply is defined in Table 27 below. This is measured over a bandwidth of 0 Hz to 20 MHz at the power supply output connectors. A 10 μF tantalum capacitor in parallel with a 0.1 μF ceramic capacitor are placed at the point of measurement.

Table 26: Ripple and Noise

+3.3 V	+5 V	+12 V	-12 V	+5 VSB
50 mVp-p	50 mVp-p	120 mVp-p	120 mVp-p	50 mVp-p

6.10 Timing Requirements

STATUS
Required

These are the timing requirements for the power supply operation. The output voltages must rise from 10% to within regulation limits ($T_{\text{vout_rise}}$) within 5 to 70 ms. The +3.3 V, +5 V and +12 V output voltages should start to rise at about the same time. All outputs must rise monotonically. The +5 V output needs to be greater than the +3.3 V output during any point of the voltage rise. The +5 V output must never be greater than the +3.3V output by more than 2.25 V. Each output voltage shall reach regulation within 50 ms ($T_{\text{vout_on}}$) of each other during turn on of the power supply. Each output voltage shall fall out of regulation within 400 ms ($T_{\text{vout_off}}$) of each other during turn off. Figure 9 and Figure 10 show the turn ON and turn OFF timing requirements. In Figure 10 the timing is shown with both AC and PSON# controlling the ON/OFF of the power supply.

Table 27: Output Voltage Timing

Item	Description	MIN	MAX	Units
$T_{\text{vout_rise}}$	Output voltage rise time from each main output.	5	70	ms
$T_{\text{vout_on}}$	All main outputs must be within regulation of each other within this time.		50	ms
$T_{\text{vout_off}}$	All main outputs must leave regulation within this time.		400	ms

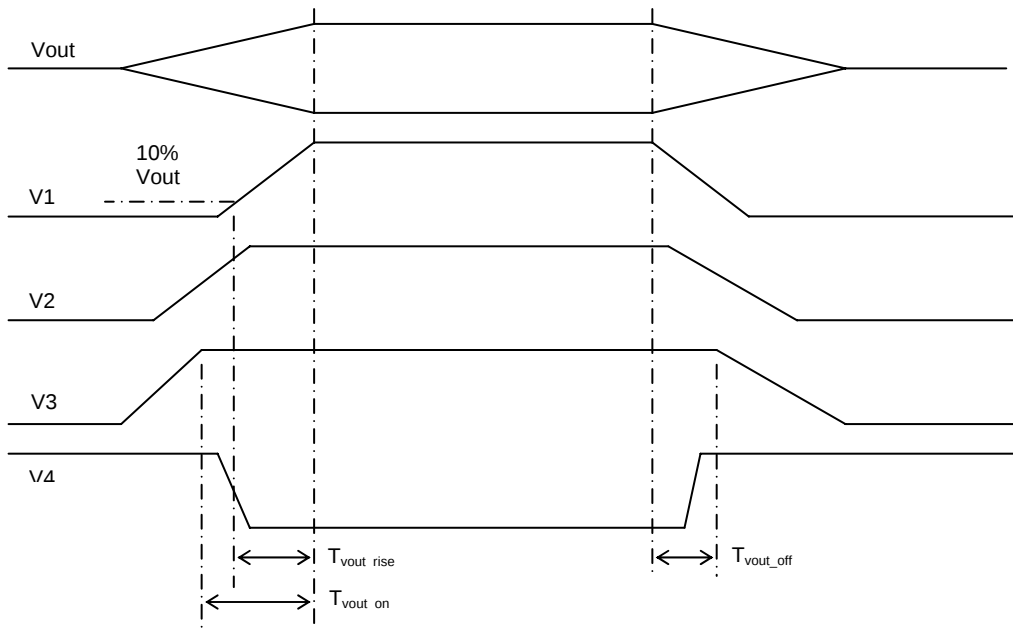


Figure 9: Output Voltage Timing

Table 28: Turn On/Off Timing

Item	Description	MIN	MAX	Units
Tsb_on_delay	Delay from AC being applied to 5 VSB being within regulation.		1500	ms
T ac_on_delay	Delay from AC being applied to all output voltages being within regulation.		2500	ms
Tvout_holdup	Time all output voltages stay within regulation after loss of AC.	18		ms
Tpwok_holdup	Delay from loss of AC to deassertion of PWOK	17		ms
Tpson_on_delay	Delay from PSON# active to output voltages within regulation limits.	5	400	ms
T pson_pwok	Delay from PSON# deactive to PWOK being deasserted.		50	ms
Tpwok_on	Delay from output voltages within regulation limits to PWOK asserted at turn on.	100	500	ms
T pwok_off	Delay from PWOK deasserted to output voltages (3.3 V, 5 V, 12 V, -12 V) dropping out of regulation limits.	1		ms
Tpwok_low	Duration of PWOK being in the deasserted state during an off/on cycle using AC or the PSON# signal.	100		ms
Tsb_vout	Delay from 5 VSB being in regulation to O/Ps being in regulation at AC turn on.	50	1000	ms

STATUS

Recommended

Item	Description	MIN	MAX	UNITS
T _{vout} _holdup	Time all output voltages stay within regulation after loss of AC.	21		ms
T _{pwok} _holdup	Delay from loss of AC to deassertion of PWOK.	20		ms
T _{sb} _holdup	Time 5VSB output voltage stays within regulation after loss of AC.	70		ms

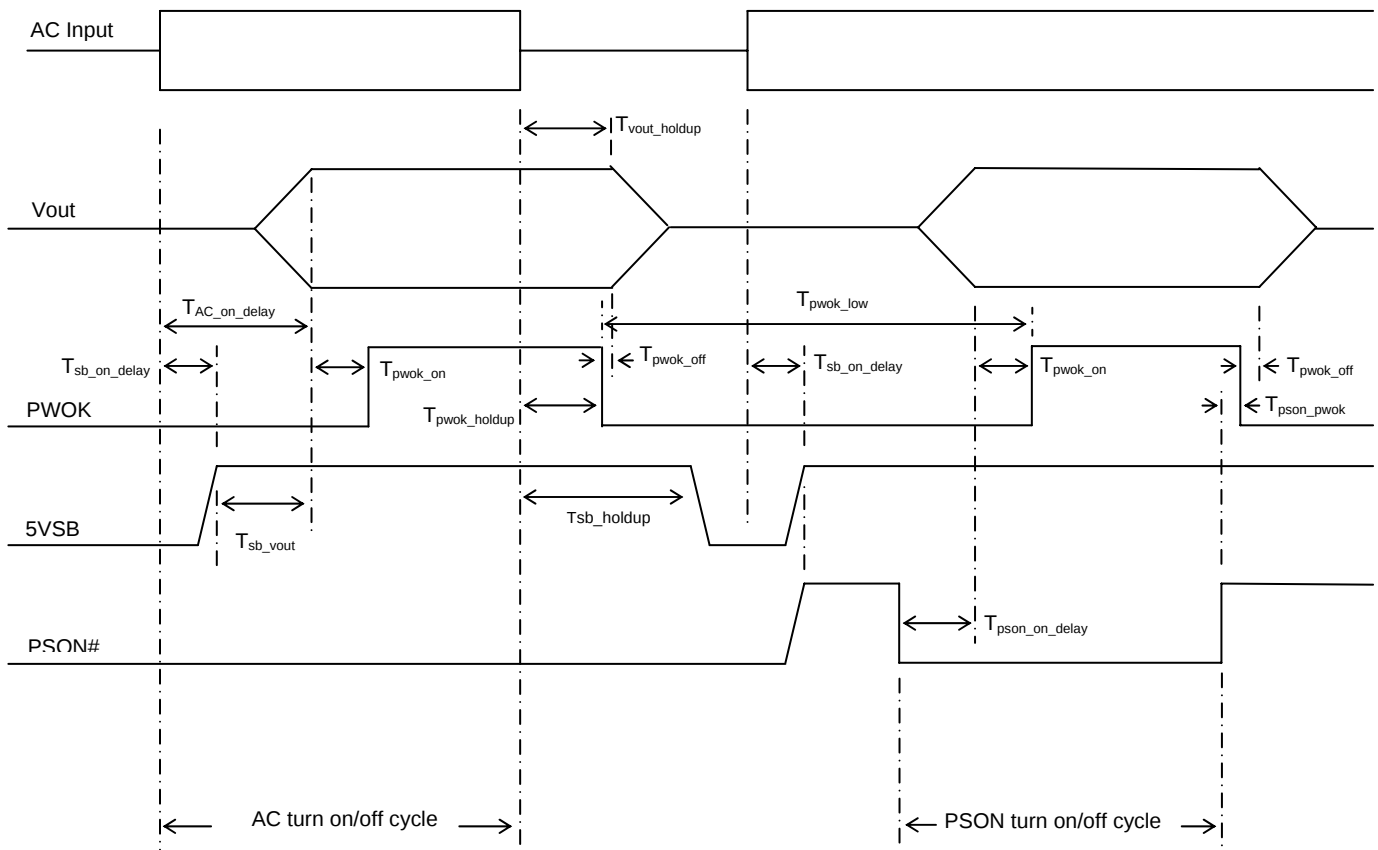


Figure 10: Turn On/Off Timing (Signal Power Supply)

7 Protection Circuits

STATUS
Required

Protection circuits inside the power supply shall cause only the power supply's main outputs to shutdown. If the power supply latches off due to a protection circuit tripping, an AC cycle OFF for 15 seconds and a PSON[#] cycle HIGH for 1 second shall be able to reset the power supply.

7.1 Current Limit

STATUS
Required

The power supply shall have current limit to prevent the +3.3 V, +5 V, and +12 V outputs from exceeding the values shown in Table 30. If the current limits are exceeded, the power supply shall shutdown and latch off. The latch will be cleared by toggling the PSON[#] signal or by an AC power interruption. The power supply shall not be damaged from repeated power cycling in this condition. –12 V and 5 VSB shall be protected under over current or shorted conditions so that no damage can occur to the power supply. All outputs shall be protected so that no damage occurs to the power supply under a shorted output condition.

Table 29: Over Current Protection

Voltage	Over Current Limit (I _{out} limit)
+3.3 V	110% minimum; 150% maximum
+5 V	110% minimum; 150% maximum
+12 V	110% minimum; 150% maximum

7.2 240VA Protection

STATUS
Recommended

System designs may require user access to energized areas of the system. In these cases the power supply may be required to meet regulatory 240VA limits for any power rail. Since the +12V rail combined power exceeds 240VA it must be divided into separate channels to meet this requirement. Each separate rail needs to be limited to less than 20A for each +12V rail. The separate +12V rails do not necessarily need to be independently regulated outputs. They can share a common power conversion stage.

Table 30: Over Current Protection

Voltage	Over Current Limit (I _{out} limit)
+3.3 V	110% minimum; 150% maximum
+5 V	110% minimum; 150% maximum
+12V1	20A maximum
+12V2	20A maximum
+12V3	20A maximum
+12V4	20A maximum

7.3 Over Voltage Protection

STATUS
Required

The power supply over voltage protection shall be locally sensed. The power supply shall shutdown and latch off after an over voltage condition occurs. This latch shall be cleared by toggling the PSON[#] signal or by an AC power interruption. Table 32 contains the over voltage limits. The values are measured at the output of the power supply's connectors. The voltage shall never exceed the maximum levels when measured at the power pins of the power supply connector during any single point of fail. The voltage shall never trip any lower than the minimum levels when measured at the power pins of the power supply connector.

Table 31: Over Voltage Limits

Output Voltage	MIN (V)	MAX (V)
+3.3 V	3.9	4.5
+5 V	5.7	6.5
+12 V1, 2, 3, 4	13.3	14.5
-12 V	-13.3	-14.5
+5 VSB	5.7	6.5

7.4 Over Temperature Protection

STATUS
Recommended

The power supply will be protected against over temperature conditions caused by loss of fan cooling or excessive ambient temperature. In an OTP condition the PSU will shutdown. When the power supply temperature drops to within specified limits, the power supply shall restore power automatically. The OTP circuit must have built in hysteresis such that the power supply will not oscillate on and off due to temperature recovering condition. The OTP trip level shall have a minimum of 4 °C of ambient temperature hysteresis.

8 Control and Indicator Functions

The following sections define the input and output signals from the power supply.

Signals that can be defined as low true use the following convention:

$signal^{\#} = \text{low true}$

8.1 PSON[#]

STATUS
Required

The PSON[#] signal is required to remotely turn on/off the power supply. PSON[#] is an active low signal that turns on the +3.3 V, +5 V, +12 V, and –12 V power rails. When this signal is not pulled low by the system, or left open, the outputs (except the +5 VSB and Vbias) turn off. This signal is pulled to a standby voltage by a pull-up resistor internal to the power supply. Refer to Figure 10 for the timing diagram.

Table 32: PSON[#] Signal Characteristic

Signal Type	Accepts an open collector/drain input from the system. Pull-up to VSB located in power supply.	
PSON [#] = Low	ON	
PSON [#] = Open or High	OFF	
	MIN	MAX
Logic level low (power supply ON)	0 V	1.0 V
Logic level high (power supply OFF)	2.0 V	5.25 V
Source current, $V_{pson} = \text{low}$		4 mA
Power up delay: $T_{pson_on_delay}$	5 ms	400 ms
PWOK delay: T_{pson_pwok}		50 ms

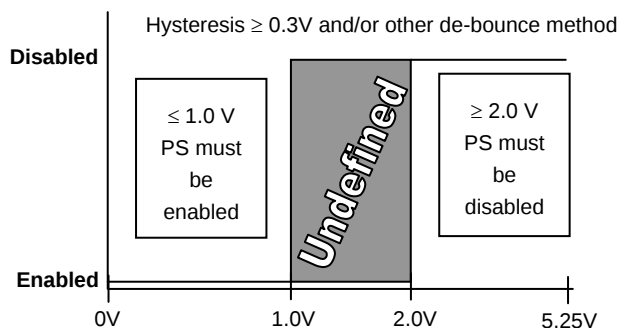


Figure 11: PSON[#] Signal Characteristics

8.2 PWOK (Power OK)

STATUS
Required

PWOK is a power OK signal and will be pulled HIGH by the power supply to indicate that all the outputs are within the regulation limits of the power supply. When any output voltage falls below regulation limits or when AC power has been removed for a time sufficiently long so that power supply operation is no longer guaranteed, PWOK will be de-asserted to a LOW state. See Figure 10 for a representation of the timing characteristics of PWOK. The start of the PWOK delay time shall be inhibited as long as any power supply output is in current limit.

Table 33: PWOK Signal Characteristics

Signal Type	+5V TTL Compatible output signal	
PWOK = High	Power OK	
PWOK = Low	Power not OK	
	MIN	MAX
Logic level low, Isink = 4mA		0.4 V
Logic level high, Isource = 200μA	2.4 V	5.25 V
PWOK delay: T _{pwok_on}	200 ms	1000 ms
PWOK rise and fall time		100 μs
Power down delay: T _{pwok_off}	1 ms	

8.3 SMBus Communication

STATUS
Optional

The serial bus communication devices for PSMI and FRU data in the power supply shall be compatible with both SMBus 2.0 'high power' and I²C V_{dd} based power and drive. This bus shall operate at 3.3V but tolerant of 5V signaling. The SMBus pull-ups are located on the motherboard and may be connected to 3.3V or 5V.

Two pins are allocated on the power supply. One pin is the Serial Clock (PSM Clock). The second pin is used for Serial Data (PSM Data). Both pins are bi-directional and are used to form a serial bus. The circuits inside the power supply shall derive their power from the 5VSB bus. No pull-up resistors shall be on SCL or SDA inside the power supply. These pull-up resistors should be located external to the power supply.

8.4 Power Supply Management Interface

STATUS
Optional

The PSMI device in the power supply shall derive its power off of the 5VSB output and grounded to ReturnS. It shall be located at address B0h. Refer to the PSMI specification posted on the www.ssiforum.org website for details on the Power Supply Monitoring Interface requirements. PSMI is a SMBus interface used to communicate power management information to the system.

8.5 Field Replacement Unit (FRU) Signals

STATUS
Optional

The FRU circuits inside the power supply must derive its power off of the 5 VSB output and grounded to ReturnS. It shall be located at address A0h. The Write Control (or Write protect) pin should be tied to ReturnS inside the power supply so that information can be written to the EEPROM.

8.5.1 FRU Data

FRU data shall be stored starting in address location 8000h through 80FFh. The FRU data format shall be compliant with the IPMI specifications. The current version of these specifications is available at <http://developer.intel.com/design/servers/ipmi/spec.htm>.

8.5.2 FRU Data Format

The information to be contained in the FRU device is shown in the following table.

Table 34: FRU Device Information

Area Type	Description
Common Header	As defined by the FRU document
Internal Use Area	Not required, do not reserve
Chassis Info Area	Not applicable, do not reserve
Board Info Area	Not applicable, do not reserve

8.5.2.1 Product Info Area

Implement as defined by the IPMI FRU document. Product information shall be defined as follows:

Table 35: FRU Device Product Information Area

Field Name	Field Description
Manufacturer Name	{Formal name of manufacturer}
Product Name	{Manufacturer's model number}
Product part/model number	Customer part number
Product Version	Customer current revision
Product Serial Number	{Defined at time of manufacture}
Asset Tag	{Not used, code is zero length byte}
FRU File ID	{Not required}
PAD Bytes	{Added as necessary to allow for 8-byte offset to next area}

8.5.2.2 MultiRecord Area

Implement as defined by the IPMI FRU document. The following record types shall be used on this power supply:

- Power Supply Information (Record Type 0x00)
- DC Output (Record Type 0x01)
- No other record types are required for the power supply.

MultiRecord information shall be defined as follows:

Table 36: FRU Device MultiRecord Area

Field Name (PS Info)	Field Information Definition
Overall Capacity (W)	350 {Low power versions would be 250 or 125}
Peak VA	400 {Low power versions would be 300 or 161}

Inrush current (A)	30
Inrush interval (ms)	5
Low end input voltage range 1	90
High end input voltage range 1	140
Low end input voltage range 2	180
High end input voltage range 2	264
A/C dropout tol. (ms)	20
Binary flags	Set for: Not Hot Swap support, Auto-switch, and PFC
Peak Wattage	Set for: 12 s, 400 W {Low power versions would be 300W or 161W}
Combined wattage	Set for 5 V & 3.3 V combined wattage of 113 W {Low power versions would be 113W or 80}
Predictive fail tach support	Not supported, 00h value
Field Name (Output)	Field Description: Six outputs are to be defined from #1 to #6, as follows: +3.3 V, +5 V, +12 V1, +12V2, -12 V, and +5 VSB.
Output Information	Set for: Standby on +5 VSB, No Standby on all others.
All other output fields	Format per IPMI specification, using parameters in the EPS1U specification.

8.6 LED Indicator

STATUS
Required

There will be a single GREEN LED to indicate power supply status. When AC is applied to the PSU and standby voltages are available the LED shall BLINK GREEN. The LED shall turn ON GREEN to indicate that all the power outputs are available. Refer to Table 38 for conditions of the LED.

Table 37: LED Indicators

Power Supply Condition	Power Supply LED
No AC power to PSU or PSU failure	OFF
AC present / Only Standby Output ON	BLINK GREEN
Power supply DC outputs ON and OK	GREEN

The LED shall be visible on the power supply's exterior face. The LED location shall meet ESD requirements. LED shall be securely mounted in such a way that incidental pressure on the LED shall not cause it to become displaced.

9 MTBF

STATUS
Recommended

The power supply shall have a minimum MTBF at continuous operation of 1) 100,000 hours at 100% load and 45° C, as calculated by Bellcore RPP, or 2) 250,000 hours demonstrated at 100% load and 45° C.

10 Agency Requirements

STATUS
Recommended

The power supply must comply with all regulatory requirements for its intended geographical market. Depending on the chosen market, regulatory requirements may vary. Although a power supply can be designed for worldwide compliance, there may be cost factors that drive different versions of supplies for different geographically targeted markets.

This specification requires that the power supply meet all regulatory requirements for the intended market at the time of manufacturing. Typically this includes:

- UL
- CSA
- A Nordic CENELEC
- TUV
- VDE
- CISPR Class B
- FCC Class B

The power supply, when installed in the system, shall meet immunity requirements specified in EN55024. Specific tests are to be EN61000-4-2, -3, -4, -5, -6, -8, and -11. The power supply must maintain normal performance within specified limits. This testing must be completed by the system EMI engineer. Conformance must be designated with the European Union CE Marking. Specific immunity level requirements are left to customer requirements.